


V-5, V-7, Sanden and 7SEU Style Compressor Oil Level Check

In V-5, V-7, Sanden and 7SEU style compressors, the oil cannot be checked where the manifold lines attach to the compressor. In order to properly check the oil for the gpd replacement V-5, V-7, Sanden, 7SEU compressors, you must remove the oil fill bolt located on the compressor housing. This bolt is shown here in the photo below:

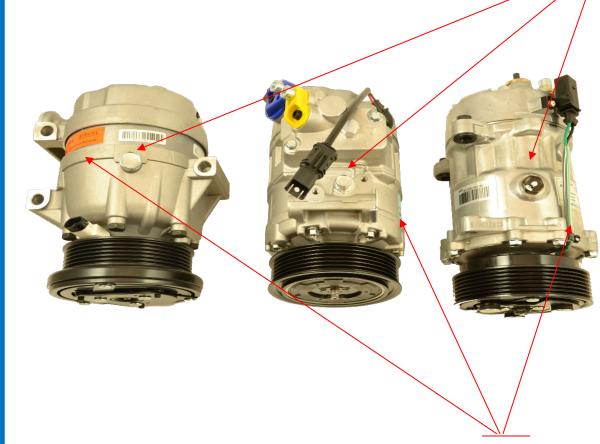

The proper amount of oil for the compressor can be found here on the side of the compressor. Please note that attempting to check the oil level from the manifold connection will not result in a correct measurement. The only way to properly check the oil is to drain the compressor completely through the oil fill bolt as shown above.

#38

gpdtechtips.com

Manufacturer names, logos and part numbers are for reference only. All prices, taxes and availability are subject to change without notice. This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to which they are addressed. If you have received this document in error, please delete it immediately. Note that any views or opinions presented in this document are solely those of the author. Any unauthorized review, use, disclosure, or distribution is prohibited. Global Parts Distributors, LLC (gpd) accepts no liability for any damage caused by any virus or other means transmitted by this document. © Global Parts Distributors, LLC (gpd)